

# **CRT Monitor Replacements**

- 14" CRT Chassis Monitor dimensions
- Uses 12.1" TFT Panel
- CGA/EGA/VGA/SVGA/XGA compatible
- Programmable for Legacy signals
- 110/230Vac or 12/24Vdc operation
- Adjustable Tilt Positions  $0^{\circ} / 5^{\circ} / 10^{\circ} / 15^{\circ}$
- Toughened Safety Glass for TFT protection (option of unprotected TFT panel 14NA series)
- Optional Remote OSD controls

The **29LW14 series** of Industrial LCD monitors has been designed as replacement for 14" CRT monitors. Ease of integration into a wide range of Measurement, Instrumentation and Human-Machine interface applications has been a key consideration. It uses KME's 29LM123(78UN) series of 12.1" TFT monitors fixed to an Openframe chassis. Base plate fixings and holes have been designed to pick up on the original CRT chassis mounting positions.

Two LCD monitor types are offered: 14A series for full protection of the TFT panel and best EMC performance; 14NA series for lowest cost – no Safety Glass or Front Cover

	Legacy signals 15kHz -SVGA	
Part Nr	29LW14A71UN	29LW14NA71UN
Safety Glass Fitted	Yes	No
Front Cover Standard Colour	Black	None
Active Display Area	246 x 184.5mm	
14" CRT Display Area (typical)	260 x 195mm (See Note 1 below)	
Brightness	$400 \text{cd/m}^2$	
Backlight Life	50,000 hours	
Video Inputs	Analog RGB 0.7Vp-p	
	TTL RGB > 2.75Vp-p via Adapter cable	
Sync. Type/Level	Separate H&V (+/-ve) TTL	
	Composite/Mixed (-ve) TTL	
	Sync-on-G	reen (-ve) 0.3V
Input Connectors	BNC x 6 + 15D	
Horizontal Scan Freqy.	15kHz – 60kHz.	
Vertical Scan Freqy.	40 – 100Hz.	
Input Voltage	110/230Vac	
Optional 12Vdc or 24Vdc	Yes	
Power Consumption (approx.)	30W max.	
Note 1: The display size of 12.1" TFTs	is smaller than a 14" CRT. This	is a safe replacement option. 15.0"

Due to a policy of continuous product development KME reserves the right to change specifications and descriptions without prior notification. All trade marks acknowledged. 29lw14(71un)1 03/2006


TFTs can be supplied (see 29LW14X series Data Sheet) BUT the display may be Over-size.







#### 12.1" LCD MONITOR FOR 14" CRT REPLACEMENT

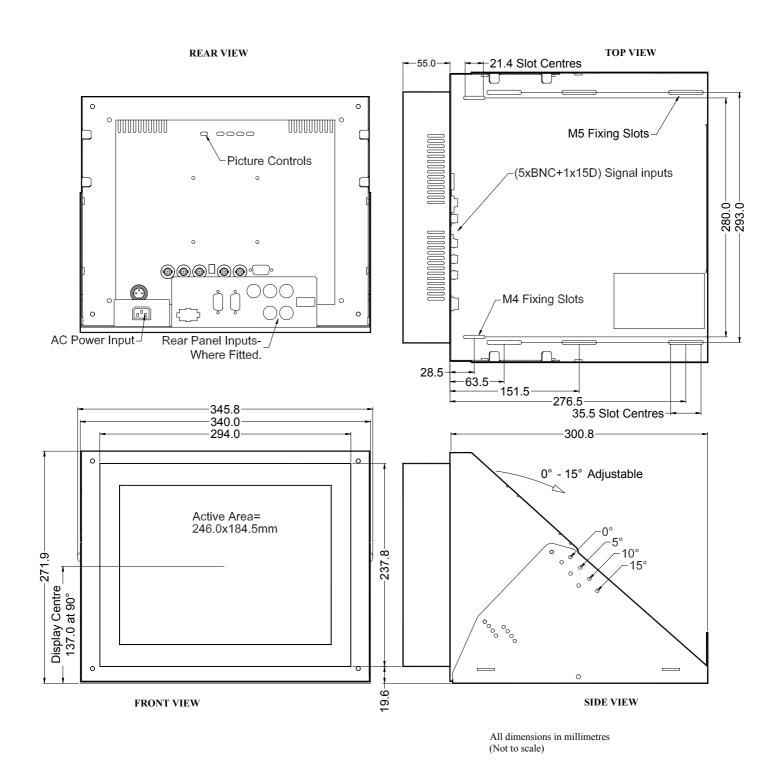


29lw14(71un)2 03/2006

### **Kent Modular Electronics Limited**

611 Maidstone Road, Rochester, Kent ME1 3QL, UK Tel: +44 (0) 1634 830123 Fax: +44 (0) 1634 830619 E-mail: <a href="mailto:sales@kme.co.uk">sales@kme.co.uk</a> URL: http://www.kme.co.uk

## 12.1" LCD MONITOR FOR 14" CRT REPLACEMENT

(No Protection Glass or Front Cover)

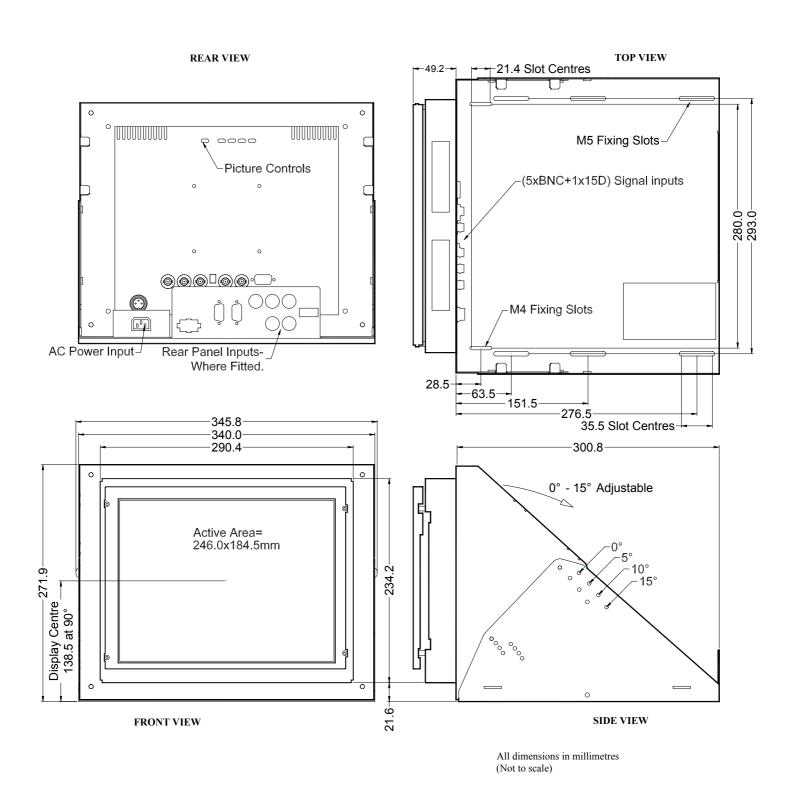

29lw14n(71un)2 03/2006

### **Kent Modular Electronics Limited**

611 Maidstone Road, Rochester, Kent ME1 3QL, UK Tel: +44 (0) 1634 830123 Fax: +44 (0) 1634 830619 E-mail: <a href="mailto:sales@kme.co.uk">sales@kme.co.uk</a> URL: http://www.kme.co.uk